


Portable Cyclus 3

There is the possibility for battery operation of the Cyclus 3. You might use a 7..10V battery (accu) connected to a power plug 5.5mm / 2.1mm.

It draws then ~71mA in standby, ~84mA with sequencer running on main page, ~92mA in the subpages (track/edit/pattern) at 8.4V.

If you'd like to connect the battery internal, the following schematic is recommended:

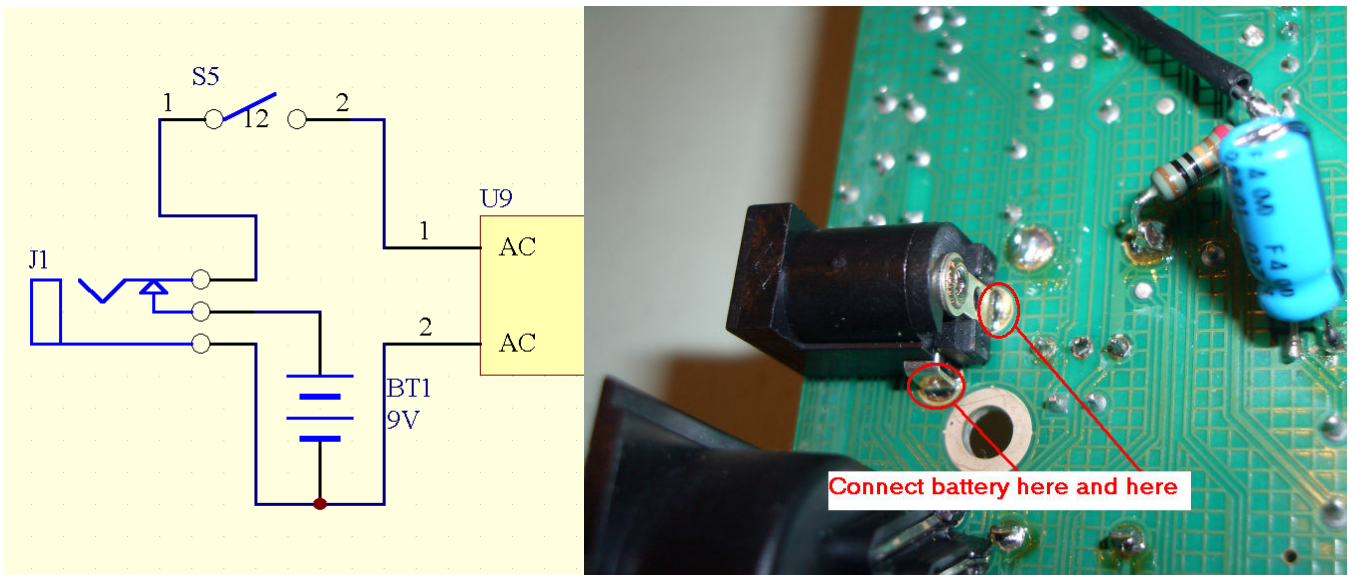

You are able to reduce this currency down to ~10mA in standby, ~25mA with sequencer running on main page, ~32mA in the subpages (track/edit...) by turning off the backlight. Please see document "Cyclus 3 modification on backlight" for details.